


I TLR1130-50W

Linear light of 1130mm with 50W led plate for surface

Product



Measures

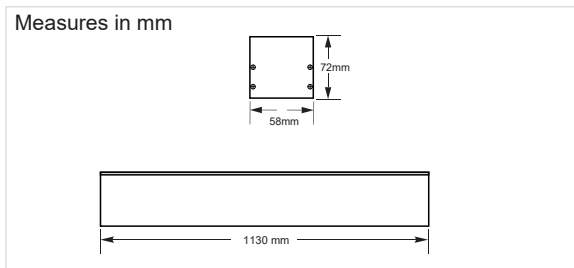

OPTIC DIFFUSER:



FINISHED:




Technical Data


Power supply:	220~240Vac 50-60Hz
Power:	50W
Nº of LEDs:	196 chip SMD 2835 NationStar
Power factor:	>0.95
Luminous efficiency:	90 lm/w
LED power:	0,25W
Luminous flux:	4500 lm (BF) 4450 lm (BN) 4400 lm (BC)
Luminous intensity:	1585cd
IP code:	IP20
Operating temperature:	-10°C +40°C
Nº of switching:	30.000
Certifications:	CE, RoHS
Energy Efficiency:	A+
Lifespan:	50.000h (L70:B10)
Dimming:	Yes, Optional, Dali, 1-10V
Weight:	2390 grammes

Photometric data


Angle =120°
Luminous Flux =4500 lm
Colour Temperature CCT =5700K (BF)
CRI =>80

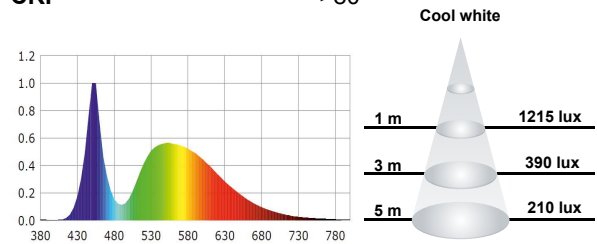


Angle =120°
Luminous Flux =4450 lm
Colour Temperature CCT =4000K (BN)
CRI =>80

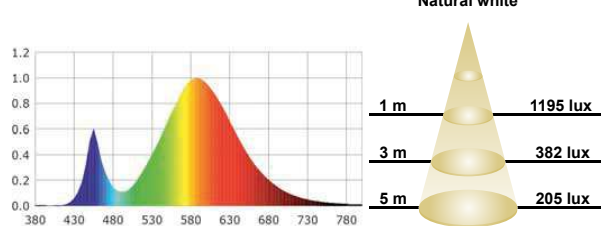

Angle =120°
Luminous Flux =4400 lm
Colour Temperature CCT =2700K (BC)
CRI =>80

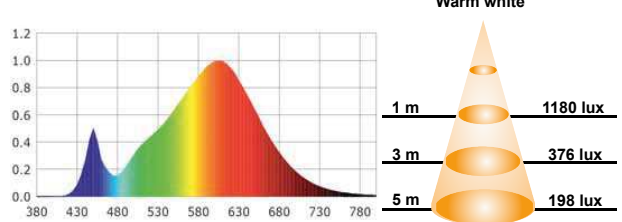

Luminous Intensity Distribution Curve

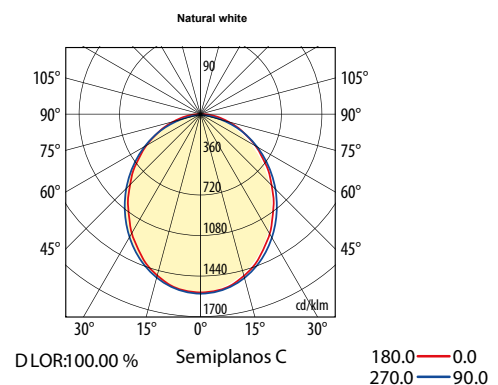

Driver used
TRIDONIC



ThreeLine
TECHNOLOGY