

# I P60X120UGR

50W 60x120 low UGR LED Panel


Options:



## Product







## Measures

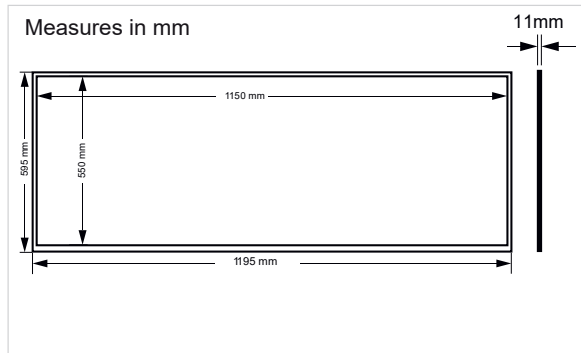

## Technical Data

Power supply:	AC 220~240V 50/60Hz
Power:	50W
Nº of LEDs:	252 chips SMD2835
Power factor:	>0.95
Luminous efficiency:	90 lm/w
LED power:	0.19W
Luminous flux:	4560 lm (BF) 4440 lm (BN) 4320 lm (BC)
Luminous intensity:	3056cd
UGR:	<19
IP:	IP20
Operating temperature:	-20°C +40°C
Nº of switching:	15.000
Certifications:	CE, RoHS
Energy Efficiency:	A+
Lifespan:	30.000h (L70:B10)
Dimming:	Yes, DM800-2000mA (Optional)
Weight:	4715 grammes

## Photometric data

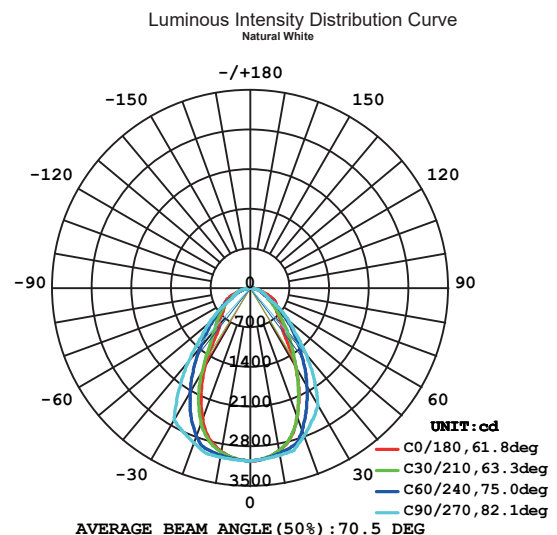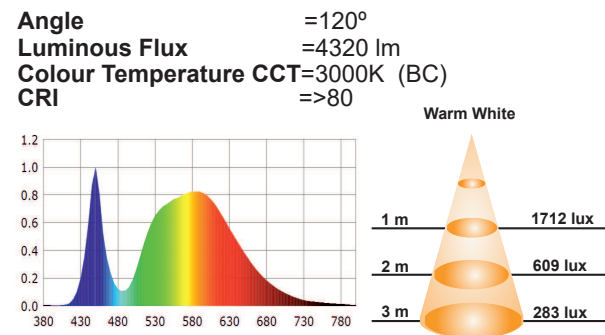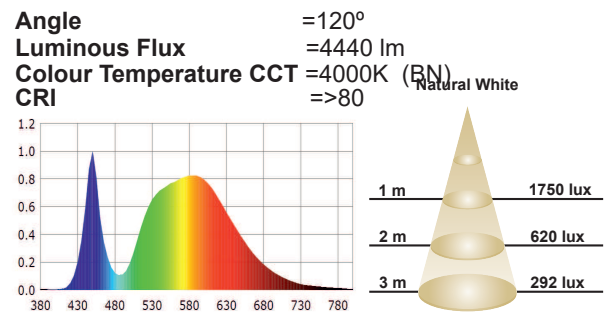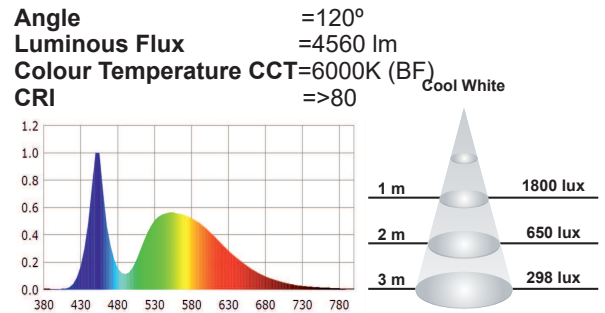

Chip used

EPIDAR



ThreeLine TECHNOLOGY